


75/20吨吊钩桥式起重机

E. O. T. Crane with Hook Cap. 75/20t

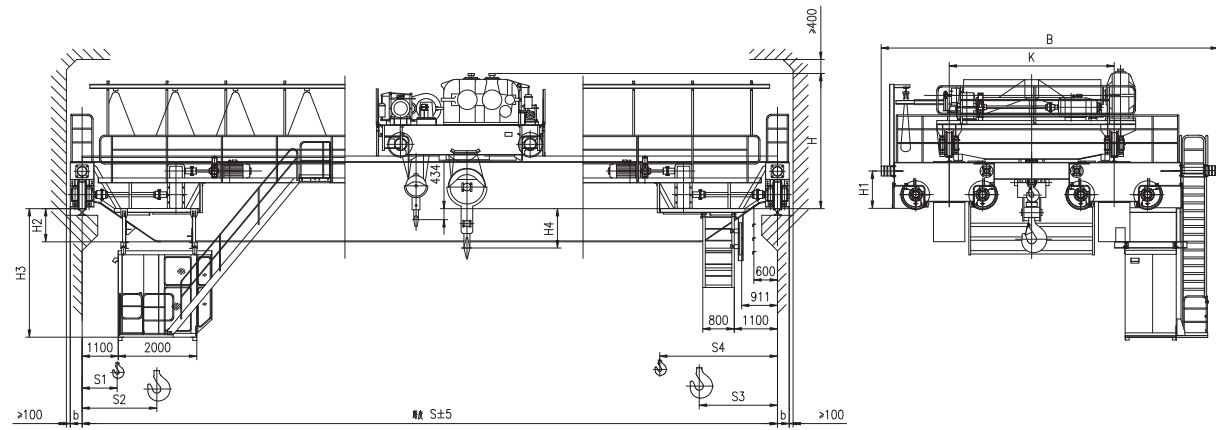


技术规格 Technical Specifications

起重量 Cap	主钩 Main	t	75													
	副钩 Aux.		20													
跨度 Span			13.5	16.5	19.5	22.5	25.5	28.5	31.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
起升高度 Lifting Height	主钩 Main	m	20													
	副钩 Aux.		22													
工作制度 Duty			A5							A6						
速度 Speed	主起升 Main	m/min	3.8							5						
	副起升 Aux		7.2													
	小车运行 Crab travelling		38.4													
	大车运行 trolley travelling		53.9							77.8						
极限尺寸 limit dimension	S1		1015													
	S2		3260													
	S3		2475													
	S4		3425													
主要尺寸 main dimension	H	mm	3302	3302	3306	3304	3308	3310	3302	3304	3308	3306	3310	3312		
	H1		950													
	H2		290	440	542	546	844	844	850	292	442	544	548	846	850	852
	H3		2710	2860	2962	2966	3264	3268	3270	2712	2862	2964	2968	3266	3270	3272
	H4		872	872	868	870	866	864	870	868	864	866	862	860		
	K		4400													
	B		8828													
	b		300													
最大轮压 Max.Wheel Loading	kN	255	268	278	290	302	309	310	257	271	282	294	303	314	322	
电机总功率 Span	kw	128							136							158
荐用钢轨 Crane Rail Recommended		QU100														
电源 Power Supply		三相交流 3-Phase A.C.50Hz 380V														

100/20吨吊钩桥式起重机

E. O. T. Crane with Hook Cap. 100/20t

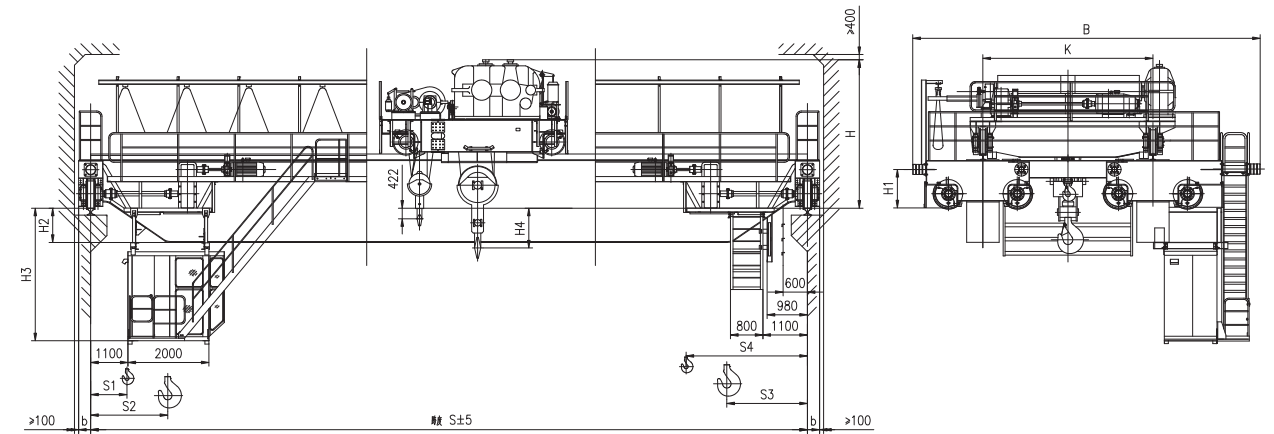

技术规格 Technical Specifications

起重量 Cap	主钩 Main	t	100														
	副钩 Aux.		20														
跨度 Span			13	16	19	22	25	28	31	13	16	19	22	25	28	31	
起升高度 Lifting Height	主钩 Main	m	18							18							
	副钩 Aux.		20							20							
工作制度 Duty			A5							A6							
速度 Speed	主起升 Main	m/min	3.1							3.9							
	副起升 Aux		7.2														
	小车运行 Crab travelling		33.9														
	大车运行 trolley travelling		61.7							61.7							61.8
极限尺寸 limit dimension	S1		985														
	S2		2300														
	S3		2650														
	S4		3965														
主要尺寸 main dimension	H	mm	3434	3434	3436	3442	3442	3444	3446	3434	3436	3438	3444	3444	3446	3448	
	H1		950														
	H2		538	540	542	548	848	850	952	540	542	544	550	850	852	945	
	H3		2958	2960	2962	2968	3268	3270	3372	2960	2962	2964	2970	3270	3272	3374	
	H4		1330	1330	1328	1322	1322	1320	1318	1330	1328	1326	1320	1320	1318	1316	
	K		4400														
	B		8868														
	b		310														
最大轮压 Max.Wheel Loading	kN	320	335	350	365	376	386	397	321	338	350	367	380	390	400		
电机总功率 Span	kw	136							154							158	174
荐用钢轨 Crane Rail Recommended		QU100															
电源 Power Supply		三相交流 3-Phase A.C.50Hz 380V															